


## Instructions for Pneumatic Deboxer/Honey Frame Lifter for Fully Automatic Uncapping Machines

Typ: KEK-P

Instructions for Pneumatic Deboxer/Honey Frame Lifter for Fully Automatic Uncapping Machines

1. Position the Deboxer next to the feeding unit of the uncapping machine.
2. Connect the Deboxer to the air compressor.
3. Slide the beehive drawer onto the Deboxer's work surface so that the inner corners reach the stop pins on the work surface.
4. Place the two toothed metal rods on top of the frames. These rods act as frame holders to prevent the frames from sliding apart as they are pushed out of the honey super.

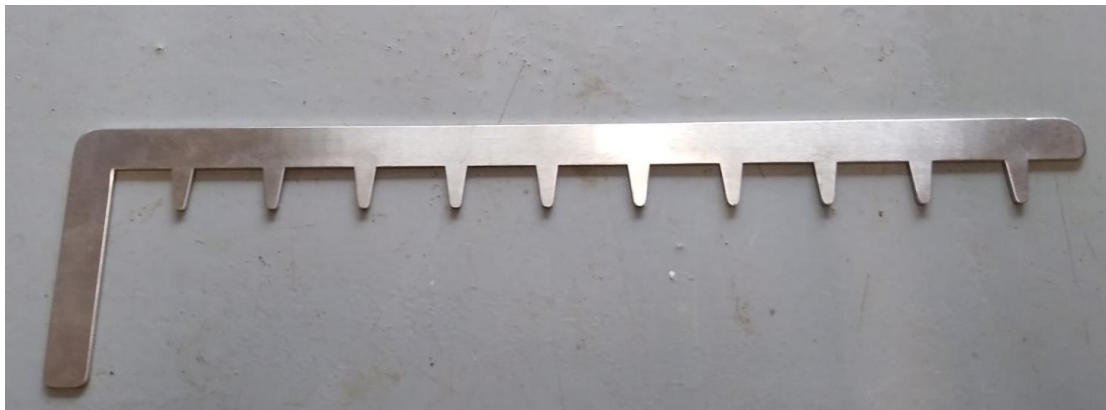

Frame holder to prevent frame slippage

Press the pedal to lift the drawer with the frames to the upper comb hanger of the Deboxer. Once the frames are secured on the comb hanger, lower the drawer to the level of the work surface and remove it. The frames can then be manually inserted into the feeding unit of the uncapping machine.



